



# Installation Directions

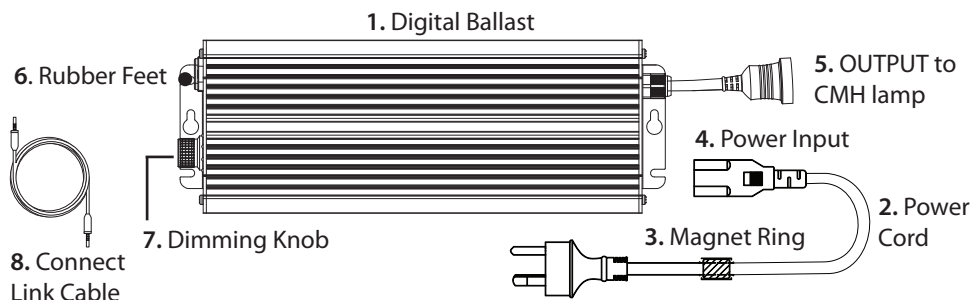

STATUS	LED
Output lock down	1 Flash
Output errors	2 Flash
Low input voltage	3 Flash
Over temperature	4 Flash
High input	5 Flash

## BOX CONTENTS:

- 1 x 315w Digital Ballast
- 1 x Power Cord
- 1 x Connect Link Cable
- 4 x Rubber Feet
- 1 x User Manual




**Note:** When the controller is connected the CONTROL indicator LED flashes 2 times every 2 seconds - indicating controller is functioning correctly. However, if the Connect Link Cable is removed during operation the ballast will shut down after 3 minutes. When operating ballast without a HI-PAR Control Station the CONTROL indicator LED will be off. Turn power off and on to reset the ballast when either connecting or disconnecting the Control Station.

MAINS POWER	MIN	MAX
100%	315	347
90%	284	317
80%	250	284
70%	217	250
60%	184	217
50%	150	184

Units = Watts

LAMP POWER	MIN	MAX
100%	296	328
90%	267	300
80%	235	269
70%	204	237
60%	172	206
50%	140	174

Units = Watts

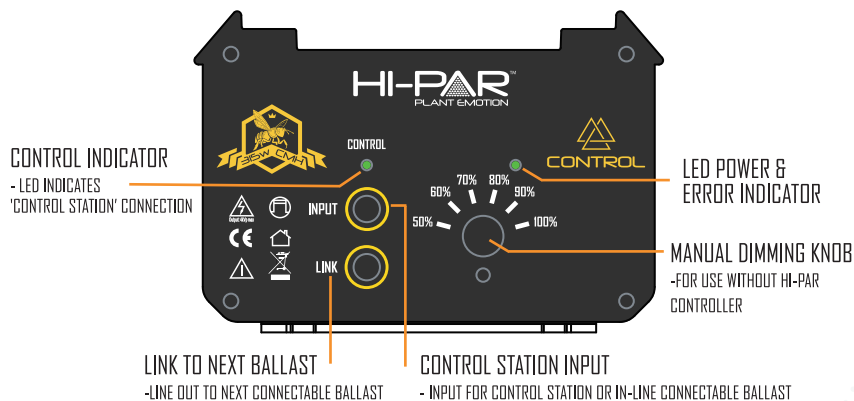

# HI-PAR™ PLANT EMOTION 315watt

## 315W CMH CONTROLLABLE BALLAST

# USER MANUAL



## HP315E Control for CMH lamps

Data is based on operation of a standard CMH lamp. Supply power is based on typical commercial 240V,50/60Hz.

### Performance


Model	Model Voltage (V)	Max Input Power (W)	THD	Maximum Current (A)	Power Factor (COSθ)	Working Voltage (V)	Ignitor Voltage (kV)
HP315E Control	240V	347	<10%	1.6	.97	216-264	4.0



SUNSTORM

WWW.HI-PAR-HORTICULTURE.COM



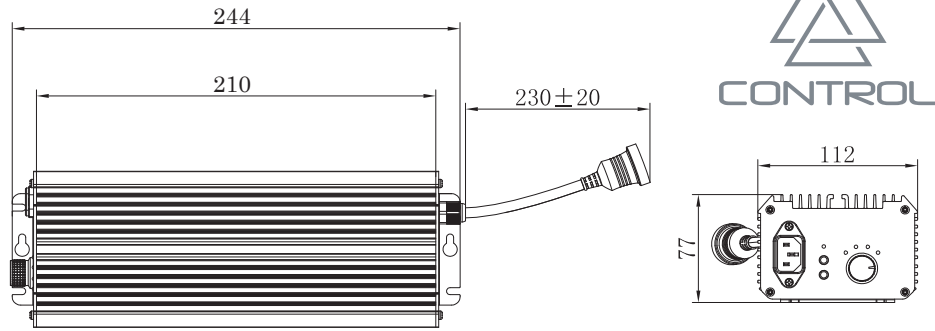

Model	Length (mm)	Width (mm)	High (mm)	Colour	Material	Weight (kgs)
HP315E Control	244	112	77	Black	Aluminium	2.5

### Connecting the Ballast

- Please refer to the included wiring diagram for proper wiring connection.
- Only use the provided cables to connect the ballast to the power supply/socket.
- Insert recommended CMH lamp into lamp socket.
- Ensure lamp type is correct orientation.
- Do not use an external ignitor.
- Lamps with auto-ignitor will not work with the digital ballast.
- Connect the ballast into the Hi-PAR Control Station.

### Ignitor Safe Protection

The Digital Ballast will ignite automatically. During this period, the ballast can protect itself without manual intervention. If lamp does not work after 15 minutes, please check the connection or change the lamp.

### User Guide

This product must be equipped with the right CMH (Ceramic Metal Halide) lamp to get the highest efficiency, safety, and luminance output from the lamp.

**WARNING:** This manual contains important safety that should be followed during the installation and maintenance of the product. Please read this manual thoroughly before attempting to install or operate this product.

1. Before any assembly or maintenance, make sure the power supply is turned off.
2. To ensure safe system operation, only use certified light shades, cords, and lamp sockets which match a national or international safety standard.
3. Lamp must be operated a distance away from any flammable substance.
4. Do not cover the digital ballast without proper heat sinking; doing so may affect the normal case temperature (tc) of the digital ballast. Improper heat dissipation may shorten ballast life and void the warranty. tc=70oC/158oF.
5. Product is for indoor/enclosed use only; it must be protected from water/liquids.
6. Ensure proper mounting and installation of the digital ballast; it must be securely fastened to a fixed substrate to protect it from detachment, impact and excessive vibrations. If not secured, damage to the unit or persons may result.
7. Please ensure the input power matches with the specifications of the digital Ballast. If you are not clear about the electrical source, please contact your power utility company, an electrician or your local distributor.
8. Install the power cord so it can not be pinched, stepped on or tripped over; secure cord and digital ballast properly to avoid lighting interruptions/hazards.
9. If the power cord needs to be extended, please make sure it meets the standard electrical safety requirement; the wire diameter should be at least 1.5mm<sup>2</sup> or 16AWG. Not following electrical code may result in fire or other accidents.
10. To avoid the risk of shock or fire, and as to not void the Warranty, do not open or disassemble the digital ballast.
11. If you have any questions on the installation of the digital ballast, or should you experience any trouble please contact your local authorised HI-PAR dealer.

## CONTROL STATION Compatible - Plug and Play

### Connecting the Ballast to the HI-PAR 'Control Station' (controller - sold separately)

- Control Station communicates with ballast via TRS (Stereo) cable
- Multiple ballasts can be installed in 'daisy-chain' arrangement
- Up to 200 Ballasts per zone, two zones per Control Station
- Control Station and Thermo Sensors regulate timing and dimming control

## Linkable 400 Fixture - 200 Ballast on each channel

